




Recreational Water Systems • White Bear Lake, MN • 612-325-2886 • SoftCell@comcast.net

Assembly and Recharging Instructions

For best results and years of trouble free service we recommend the use of a PRE-FILTER

Attached Pre-Filter Assembly

- Wrap 4" brass connector threads with Teflon Tape.
- Remove clear canister from Pre-Filter top; attach the top to 4" brass connector, hand tighten.
- Insert filter element into canister, attach to top, and connect hose.


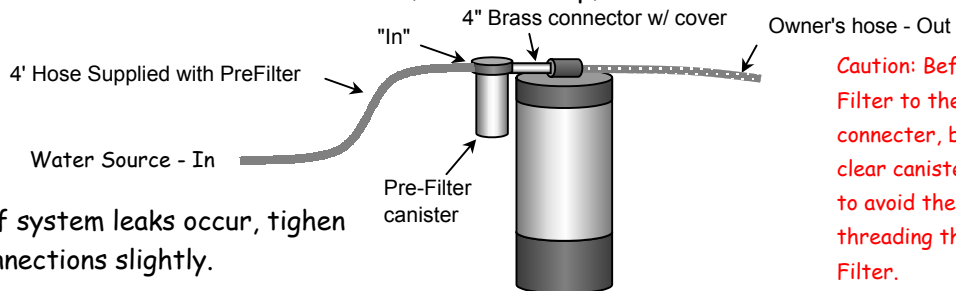


Caution: Before attaching Pre-Filter to the threaded brass connector, be sure to remove the clear canister from the Pre-Filter to avoid the risk of cross-threading the top of the Pre-Filter.

- If system leaks occur, tighten connections slightly.

Re-Generating Instructions

- Remove hose from pre-filter and attach hose to the "Out" side of the softener, run water for 10 minutes to backflush.
- Remove filter element from pre-filter canister and re-attach hoses.
- Fill pre-filter canister with household water softener salt and pivot upside-down.
- Run water at the slow rate (1/2 gallon per minute) until salt is dissolved and there is no salt taste in the water being discharged.
- Install new filter element in the Pre-Filter canister and connect unit to water supply.

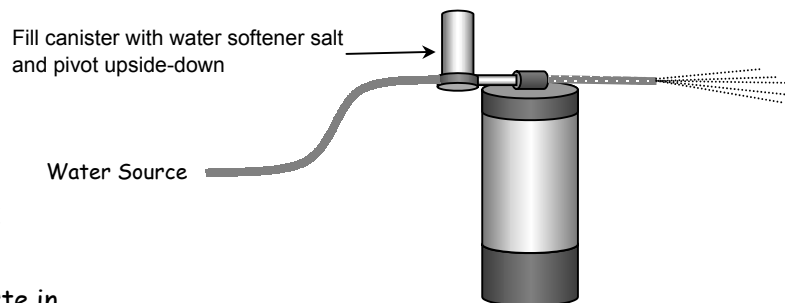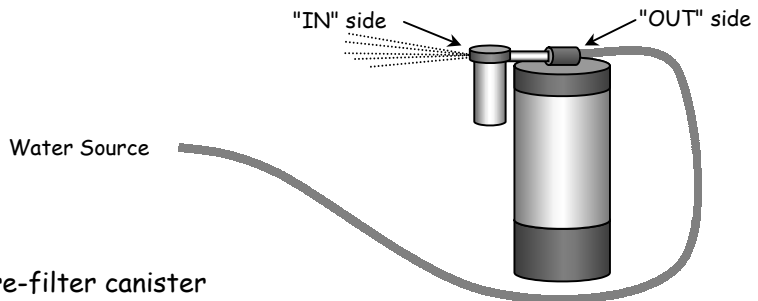

Your SoftCell softener is now ready for regular use. The hardness of your water will determine how often regeneration will be required. The softener should be regenerated when soap suds aren't lasting as long and water spots appear after final rinse is left to dry.

Winterizing and Long Term Layup Instructions

- It is recommended that the softener be re-generated before storage.

Long Term Storage and Winterization

- Remove all hoses.
- Remove element from pre-filter canister.
- Invert softener and empty out all water.
- **That's all you need to do !!!!**

Re-commissioning

- Connect to water supply and run water 10 minutes.

